
Introduction on how to set the handheld as the telnet client

We cannot log in telnet server by command since Wince has cut the telnet command. However, we can achieve it by using PocketPuTTY tool which supports the three remote logging in methods (including SSH1, SSH2 and telnet) as the telenet client. We use telnet as the demonstration in this document by copying PocketPuTTY tool to the handheld.



Input the address of telnet server in the connection input box, choose the method of telnet and click 'OK', then the following interface will skip out automatically;

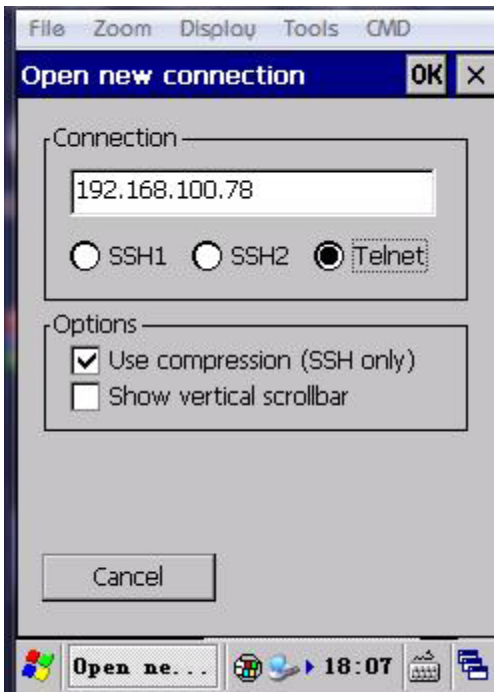

Input the user name and password and then press 'Enter' to connect to the telnet server.


2012/05/14 15:30 0 ftpt
est.txt
2012/03/06 01:06 <DIR> Link
s
2012/03/06 01:06 <DIR> Musi
c
2012/05/07 10:26 <DIR> Pict
ures
2012/03/06 01:06 <DIR> Save
d Games
2012/03/06 01:06 <DIR> Sear
ches
2012/03/06 01:06 <DIR> Vide
os
2012/05/14 15:30 241,664
exe5
2 241,664
13 8,067,477,504
C:\Users\ps731.ps731-PC>
Tools
192.168...
18:10