



360° RFID Optical Tag STA 36081

The 360° RFID Optical Tag is designed to protect Glasses at the store level while improving inventory accuracy and visibility throughout the supply chain. It has 360° adjustable design that well balance the customer's shopping experience and products performance.

Physical Specification

Dimension :	26.2×76.4×24.4 mm
Surface material:	ABS
Color:	Black or customized
Mount way:	Lock on the legs of the glasses frame
Printing:	Customized Printing available
Quality Assurance:	100% Performance Test


Electrical Specification

Protocol:	ISO/IEC 18000-6C & EPC global Class 1 Gen 2
Operating Frequency:	865-868 MHz/902-928 MHz
Integrated Circuit [IC]:	R6
EPC Memory:	96 Bits
Unique TID:	48 Bits
Read Range:	RFID: up to 4 m on fixed reader up to 2 m on Handheld reader EAS: up to 1 m
Expected read cycles:	100,000 cycles



Radiation Patterns

Read Range

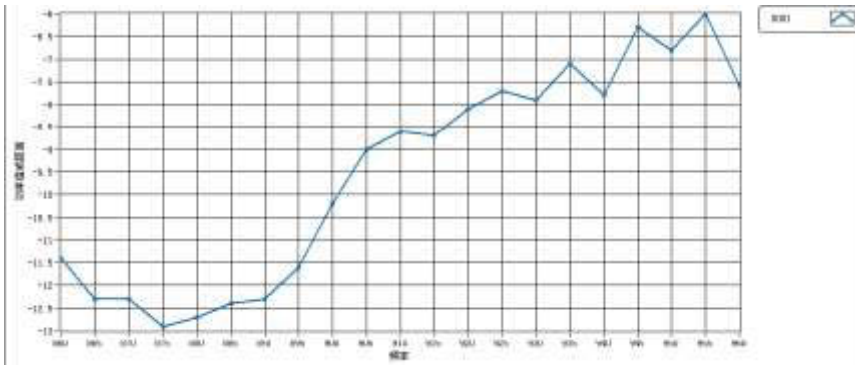


Packing information

Weight per pieces:	12 g
Quantity per box:	500 pcs
Box Dimension:	39×29×17.5 cm
Weight per box:	6.4 kg

Environmental

Operating Temperature:	-20°C to +60°C
Operating Humidity:	30%-70%
Storage Humidity:	30%~70%
Certificate:	RoHS, EPC Global
Warranty:	2 years

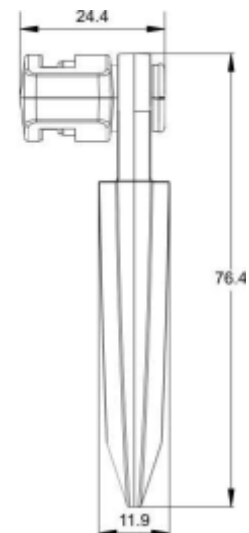

Smarter... Faster... Higher...
STALLION GROUP
 INDIA | UAE | QATAR | OMAN

STALLION SYSTEMS AND SOLUTIONS PVT. LTD.

Ph: 0484 2314592 Email : marketing@stallionindia.com

Branches : Mumbai | Delhi | Bangalore | Ahmedabad | Hyderabad | Chennai | Kolkatta | Kochi
 Pune | Silvasa | Chandigarh | Trivandrum | Alleppey | Thrissur | Calicut | Kannur

MIDDLE EAST

STALLION SYSTEMS FZE, UAE | STALLION LABEL INDUSTRIES LLC, UAE | GLOBAL STALLION SYSTEMS WLL, QATAR | STALLION SYSTEMS LLC, OMAN



www.stallionglobal.com
 An ISO 9001: 2015
 Certified Company

BARCODE | RFID | AUTOMATION | POS | SOFTWARE | CONSUMABLES