

## AUTOID®UF3 Fixed UHF RFID 4 Channel Reader

Industrial quality, Scenario-based algorithm, greatly improve data collection efficiency



### Better RFID Performance for Higher Value

- Built-in R2000 chip module for powerful read and write performance
- Wide range applications with the support of ISO18000-6C/6B class1 Gen2 protocol
- Recognition efficiency guaranteed with -86dBi ultra-high sensitivity and more complete label reading
- More efficient work with the label recognition speed of over 700pcs/s



### Industrial Grade Protection

- High-strength aluminum alloy case, IP54 sealing standard and rugged
- Industrial lightning protection and anti-magnetic design to ensure the safe operation
- Smart monitoring of working status, real-time operation of 24/365 service.



### High-performance multi-label algorithm

- Multi-label algorithm designed for fast reading scenarios meets the demanding requirements of the application and the label reading accuracy is up to 99.99%



### Option PoE Power Supply


- PoE power supply reduces the device wiring and helps enterprises decrease costs




### Flexible Operation

- External antenna which can adjust the distance according to the actual requirement of the application scenario to improve the reading efficiency

## Application Fields

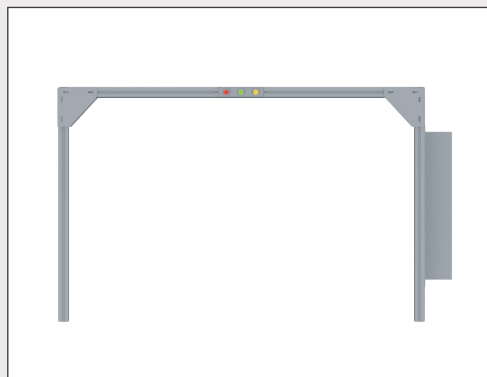

Storage In-out Stock

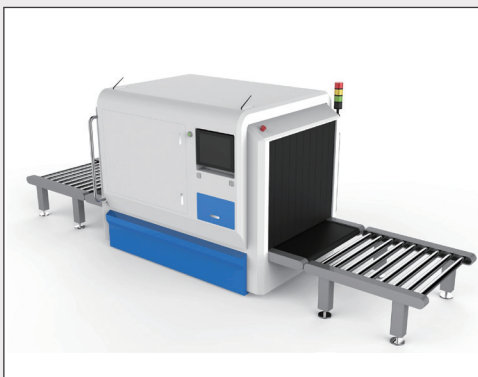

Pipeline Channel Machine Inventory



Smart Cabinet Application


# AUTOID®UF3 Technical Parameters

RFID Engine	Impinj R2000
Label Protocol	EPC C1 GEN2 / ISO18000-6C/6B
Working Frequency	860Mhz – 960Mhz(It can be adjusted according to the requirements of different countries or districts)
RFID Performance	>700 pcs/s
Output Power	Adjustable from 5dBm to 33dBm (+/-1.0dBm)
Communication Protocol	RS232/485, Wiegand, TCP/IP (4G, WIFI optional)
I/O	2 sets of optocoupler inputs and outputs
Status Indicator	Power Indicator, RFID Working Status Indicator and Buzzer
Power Supply	9-12VDC Option PoE Power Supply
Power Consumption	Maximum 1.2A
Environmental Characteristics	Working Temperature: -20℃ to +60℃ Storage Temperature: -25℃ to +80℃
Protection	IP54
Antenna Interface	TNC*4
Size	230*156*30mm

If there is any parameter change, no further notice will be given.



Scan QR code to download the single-page product document

 400-677-0876